

MH3026

WHEEL MATERIAL HANDLER



Engine Model
Maximum Operating Weight
Maximum Reach

Cat® C7.1
29 200 kg (64,370 lb)
13 000 mm (42.7 ft)



MH3026

WHEEL MATERIAL HANDLER

We know that when it comes to material handling equipment, your success depends on productivity and low operating costs. The Cat® MH3026 has simple-to-use technologies, a redesigned cab for enhanced comfort, and more machine options to match your work. Combine these features with up to 10 percent lower operating costs and you have a safe, quality, and reliable product that will provide you with the superior performance you need for your toughest indoor material handling applications.



SUPERIOR PERFORMANCE

Work faster with up to 15% more swing torque. A reach offering up to 13 m (42'8") let's you move more material without repositioning the machine.

UP TO 10%

With extended maintenance intervals and fewer connections and hoses, you get more done at a lower cost compared to the previous model.

MORE OPERATOR EFFICIENCY

Offering the industry's highest level of standard factory-equipped technology, including 2D E-fence and Payload. An ergonomic cab design with standard joystick steering improves operator comfort and efficiency.

LATEST FEATURES



- Cab Monitor Improvements
 1. Continuously improved user interface allows for intuitive navigation, minimizing performance interruption with the easy-to-use touchscreen menu.
 2. Identify apps quickly with a grid list view, abbreviated app names, and categorized menu options.
 3. A notification center keeps important information visible to the operator, and displays messages without shrinking the camera view.
 4. Color coded notifications set critical messages apart from the rest.
 5. Use the in-monitor QR code to learn about machine technology and features through a full suite of “how-to” videos.
- Enhance visibility to make service work easier and safer with optional inspection lighting.
- Standard integrated vehicle health management system alerts the operator with service guidance and parts needed to enhance uptime.

Not all features are available in all regions. Please check with your local Cat dealer for specific offering availability in your area. Build Number: 07D

HIGH PERFORMANCE



- Use up to 10% less fuel than the previous model without impacting your productivity.
- The Cat C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V and Japan 2014 emission standards with an aftertreatment system that requires no scheduled maintenance or downtime.
- The advanced electro-hydraulic system provides the optimum balance of power and efficiency while giving you the control you need.
- Valve priority puts hydraulic pressure and flow where you need it.
- Boost lifting capabilities improve the controllability of heavy loads with heavy lift mode.
- Program and store your preferred power mode and joystick settings using your operator ID. The machine will automatically remember your selections.

TAKE THE GUESSWORK OUT OF MANAGING YOUR EQUIPMENT

- Cat Payload helps you achieve precise load targets to improve your operating efficiency. Pick up a load of material – with a bucket and thumb combination or grapple and clamshell attachments – and get a real-time weight estimate without swinging.
- Combine Payload with VisionLink® and remotely manage your production targets.
- VisionLink provides actionable data insights for all assets – regardless of fleet size or equipment manufacturer.* Review equipment data from your desktop or mobile device to maximize uptime and optimize assets. Dashboards provide information such as hours, miles, location, idle time, and fuel utilization. Make informed decisions that lower costs, simplify maintenance, and improve safety and security on your jobsite.
- VisionLink Productivity gathers and summarizes machine telematics and jobsite data from all your equipment – regardless of the manufacture.* View actionable information such as idle time, fuel burn, location, payload, load counts, total cycles, and more to improve machine efficiency, productivity, and utilization. Access data anywhere via a mobile, tablet, or desktop device – on or off the jobsite.
- Remote Troubleshoot is a mobile application that allows your Cat dealer to perform diagnostic testing on your connected machine remotely to help ensure that issues are resolved quickly and with less downtime.

*** Data field availability can vary by equipment manufacturer.**



WORK IN COMFORT



- Choose between Deluxe and Premium cab options.
- The Deluxe seat is heated and air adjustable, while the Premium seat is heated and ventilated and adjusts automatically.
- The cab has a wide seat that adjusts for operators of all sizes.
- Control the machine comfortably with easy-to-reach controls.
- Standard automatic climate control keeps you at the right temperature all shift long.
- Stow your gear with plenty of in-cab storage beneath and behind the seat, overhead, and in the consoles. A cup holder, document holder, bottle holder, and coat hook are also provided.
- Connect to personal devices via the standard radio's USB ports and Bluetooth® technology.
- Optional auxiliary relay powers on and turns off CB radios, beacon lights, and other attachments without taking your hands off the joysticks.
- Cat continues to improve user interface functionality for operators of all skill levels. The touchscreen monitor is an easy-to-use operating tool that presents the jobsite dashboard with an intuitive format.
- Productivity applications are displayed in grid view to read on the go, and touchscreen navigation is programmed to ensure job performance continues without any hold-ups.

RELIABLE, DURABLE, AND VERSATILE

- Count on your machine to withstand wear throughout the years. Boom, sticks, and other high-stress areas are reinforced with thick multi-plate fabrications, castings, and forgings to ensure quality and reliability.
- Work up to 3000 m (9,840 ft) above sea level without derating.
- Don't let the temperature stop you from working. The material handler has a standard high-ambient temperature capability of 52° C (125° F) and cold start capability of -18° C (0° F).
- Auto warm up speeds up hydraulic oil warming in cold temperatures and helps prolong the life of components.
- Match your machine to your application. Multiple configurations allow you to customize your machine to your needs.
- Equip your MH3026 with an optional 15 kW generator for magnet operation. Generator controls are fully integrated into the cab monitor.
- Expand your work capabilities with attachments for a variety of applications.
- Make operating easier with the touch of a joystick button. Additional auxiliary relays allow you to power on or turn off a CB radio, beacon light, and even a dust suppression watering system without taking your hands off the joysticks.




SAFETY



- Cab Avoidance helps you avoid contact between your worktool and the cab.
- Standard 2D E-Fence prevents your machine from moving outside operator-defined parameters.
- Ground-level shutoff switch stops all fuel to the engine when activated and shuts down the machine.
- Keep your machine secure with Operator ID. Use your PIN code on the monitor to enable the push-button starting feature.
- Enjoy great all-around visibility with the help of smaller cab pillars, larger windows, and a flat engine hood design. Rearview and side-view cameras are standard.
- Standard 1800-lumen LED exterior lights illuminate your surroundings for a safer work environment.
- Thick impact-resistant windshields fulfill P5A standards.
- Service platform design provides easy, safe, and quick access to the upper service platform. The service platform steps use an anti-skid punch plate to prevent slipping.
- The standard hydraulic lockout lever isolates all hydraulic and travel functions in the lowered position.
- Optional Operator Protective Guards (OPG) protect from falling and flying debris.
- When activated, the ground-level shutoff switch stops all fuel in the engine and shuts down the machine.
- In an emergency, safely lower the cab with the cab lowering valve behind the cab riser or to the right of the seat. The valve located behind the cab riser is easily accessible.
- Boom and stick lowering check valves prevent reverse flow, keeping your front linkage securely in place should the hydraulic system unexpectedly lose pressure.
- Make service work more accessible and safer with optional inspection lighting. With the flip of a switch, lights will illuminate the engine pump, battery, and radiator compartments to enhance visibility.

MAINTENANCE

- Track your machine's filter life and maintenance intervals via the in-cab monitor.
- Using Cat genuine oil and filters and doing your typical S-O-SSM monitoring will double the current service interval to 1,000 hours, giving you greater uptime to do more work.
- Expect the latest air intake filter with pre-cleaner to last up to 1,000 hours – a 100% increase over the previous filter.
- The latest hydraulic oil filter provides improved filtration performance, anti-drain valves to keep oil clean when the filter is replaced, and longer life with a 3,000-hour replacement interval – 50% longer than previous filter designs.
- High-efficiency cooling fans run only when needed; you can program intervals so they automatically reverse to keep cores clean without interrupting your work.
- S-O-S ports are on ground level, simplifying maintenance and allowing for quick, easy extraction of fluid samples for analysis.
- Boost productivity with proactive service reminders. The integrated vehicle health management system alerts the operator with step-by-step service guidance and the parts needed so you don't experience unnecessary downtime.

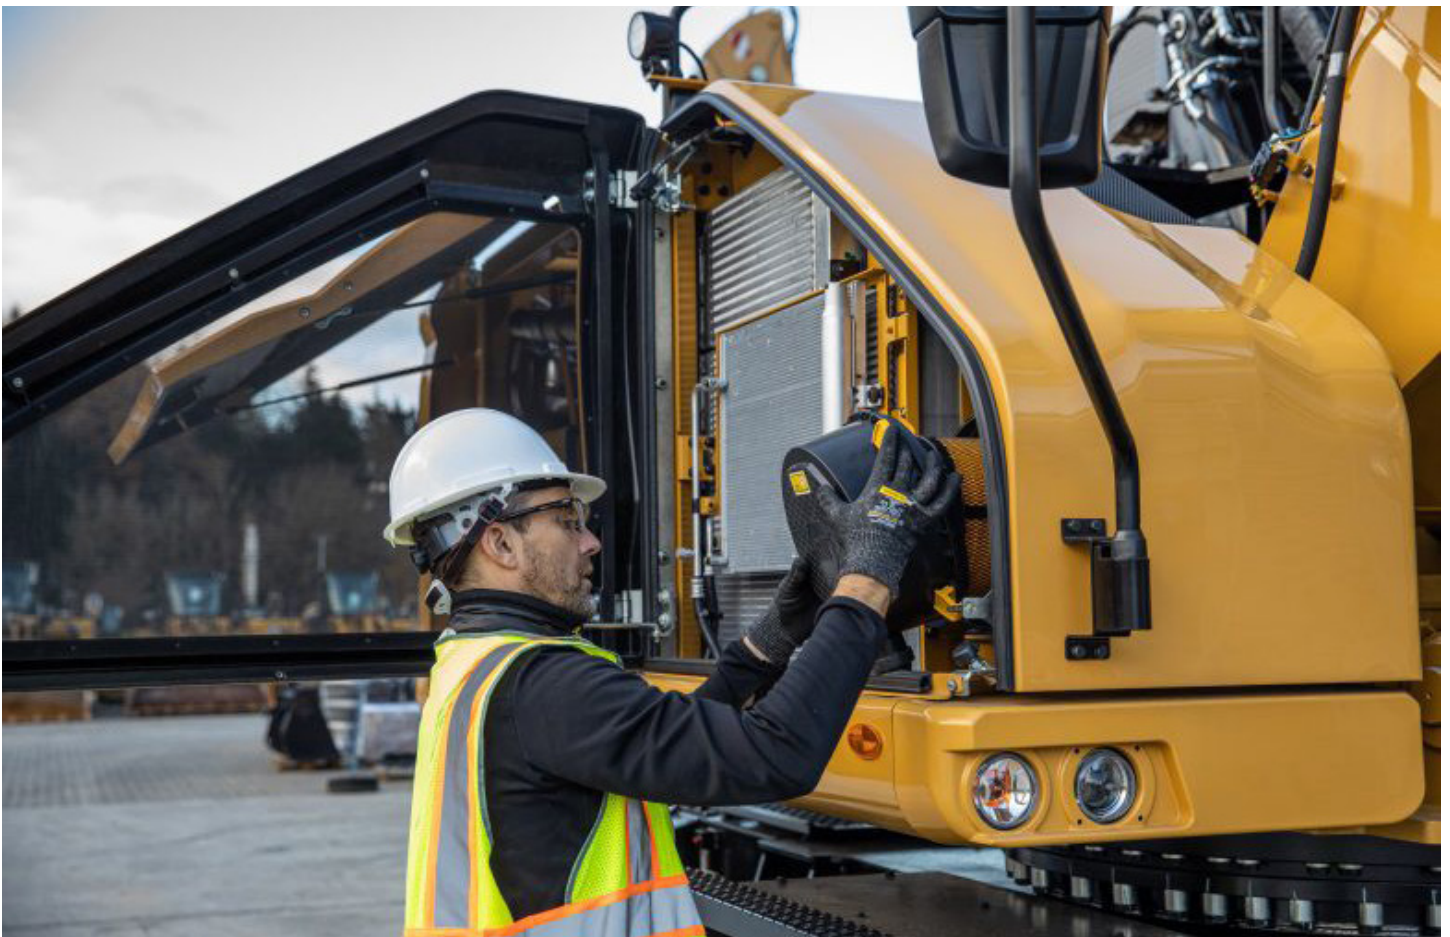

SUSTAINABILITY

- The Cat C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V and Japan 2014 emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to: 20% biodiesel FAME (fatty acid methyl ester)* or 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels. Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.
- Auto Engine Speed Control reduces unnecessary fuel burn and greenhouse gas emissions by allowing the engine to automatically go into idle mode when the machine is not working.
- Cat® 2D E-fence keeps the front linkage within a predefined work area to avoid hazards such as traffic – not only helping keep personnel safe but also helps avoid repairs, downtime, and costly jobsite fines.
- Extended maintenance intervals reduce downtime and decrease the amount of fluid and filters that are replaced over the life of the machine.
- VisionLink displays the CO₂ emissions for monitored assets, calculated by fuel type for the Runtime Fuel Burned each day in a selected date range.
- Remote Flash minimizes downtime and maintenance time while keeping your asset running with maximum efficiency. Alerts for machine updates are sent virtually from your Cat dealer and updates can be deployed without a dealer technician needing to be onsite.
- Remote Troubleshoot decreases maintenance time and keeps your machine running with maximum efficiency by allowing your Cat dealer to virtually test the machine while working. Once a problem is identified, a technician can fix it the first time, saving time and money.

****Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).***

*****Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.***



MORE THAN MACHINES

BUILT AROUND YOUR SUCCESS

When you buy Cat equipment, you get so much more than the machine. You also get the support of a best-in-class dealer network, backed by a range of flexible solutions, technology, tools, and more.



CUSTOMER VALUE AGREEMENTS

A Customer Value Agreement (CVA) from your Cat dealer helps you do more and worry less. A CVA simplifies machine ownership and maintenance, adds the security of expert dealer support, and gives you the peace of mind from effective equipment health management.

GENUINE CAT PARTS

Genuine Cat parts deliver the highest level of reliability and productivity. Order direct from your Cat dealer or shop online at parts.cat.com.

REPAIR OPTIONS

A broad range of repair options gives you choices that work with your needs, budget, and timeline. Every repair is performed by expert Cat technicians. You'll receive smart repair advice, a timely, accurate quote, and service that gets your machine back into action quickly.

FINANCIAL SERVICES

Count on Cat Financial to provide the best finance and extended protection solutions for your business. For more than 30 years, we have helped our customers succeed through financial service excellence.



DOZERS



SKID STEERS



MATERIAL HANDLERS



EXCAVATORS



WHEEL LOADERS



TRACK LOADERS

INCREASE YOUR PRODUCTIVITY AND PROFIT WITH CAT ATTACHMENTS

Easily expand the performance of your machine by using Cat attachments. Each Cat attachment is designed to fit the weight and horsepower of Cat material handlers for improved performance, safety, and stability. Complete attachment guides can be found in the technical specifications documents.

GSH – ORANGE PEEL GRAPPLES



GSV – ORANGE PEEL GRAPPLES



DEMO AND SORTING GRAPPLES



CLAMSHELL GRAPPLES



MULTI-PROCESSORS



TECHNICAL SPECIFICATIONS

Engine

Engine Model	Cat C7.1	
Net Power – ISO 9249	128 kW	171 hp
Net Power – ISO 9249 (DIN)	174 hp (metric)	
Engine Power – Maximum – ISO 14396	129 kW	174 hp
Engine Power – ISO 14396 (DIN)	176 hp (metric)	
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	7 l	427.8 in ³
Biodiesel Capability	Up to B20 ¹	
Emissions	Meets U.S. EPA Tier 4 Final and EU Stage V emission standards.	

Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system, and alternator with engine speed at 2,200 rpm. Advertised power is tested per the specified standard in effect at the time of manufacture.

¹Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to: 20% biodiesel FAME (fatty acid methyl ester)* or 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels. Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

*Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel (for use of blends higher than 20% biodiesel, consult your Cat dealer).

**Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.

Transmission

Maximum Gradeability	(23 500 kg/51,810 lb)	
Maximum Travel Speed (with steering wheel)	20 km/h	12.4 mile/h
Maximum Travel Speed (with joysticks)	15 km/h	9.3 mile/h
Drawbar Pull	127 kN	28,551 lb/ft

Hydraulic System

Maximum Pressure – Implements	37 000 kPa	5,366 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	39 000 kPa	5,656 psi

Machine Weights

Maximum Operating Weight	29 200 kg	64,370 lb
Minimum Operating Weight	26 400 kg	58,200 lb

Swing Mechanism

Maximum Swing Torque	70 kN-m	51,800 ft-lbf
----------------------	---------	---------------

Service Refill Capacities

Fuel Tank Capacity	416 l	109.9 gal
Engine Oil	20 l	5.3 gal
Hydraulic Tank	209 l	55.2 gal
Hydraulic System – Including Tank	345 l	91.1 gal
Rear Axle – Housing (Differential)	14 l	3.7 gal
Front Steering Axle – Differential	11 l	2.9 gal
Powershift Transmission	2.5 l	0.7 gal
Diesel Exhaust Fluid Tank	30 l	7.9 gal
Cooling System	40 l	10.6 gal
Final Drive – Each	2.5 l	0.7 gal

Dimensions

Boom	MH Boom 7.5 m (24'7")	
Stick	Drop Nose 6.0 m (19'8")	
Shipping Height (with OPG, without stick)	3375 mm	11.1 ft
Shipping Length	10 700 mm	35.1 ft
Shipping Length (with push blade)	11 190 mm	36.8 ft
Machine Length	5450 mm	17.9 ft
Machine Length (with push blade)	6115 mm	20.1 ft
Tail Swing Radius	2800 mm	9.2 ft
Counterweight Clearance	1305 mm	4.3 ft
Cab Height- Lowered	3350 mm	11 ft
Cab Height-Lowered with OPG	3375 mm	11.1 ft
Cab Height-Raised	5750 mm	18.9 ft
Cab Height-Raised with OPG	5,775 mm	18.9 ft
Wheel Base	2750 mm	9 ft
Shipping Width	2990 mm	9.9 ft
Ground Clearance	320 mm	1.1 ft
Undercarriage Length	5300 mm	17.4 ft
Undercarriage Length (with push blade)	5970 mm	19.6 ft
Upper Frame Width (including handrails)	2740 mm	9 ft

Working Ranges

Boom	MH Boom 7.5 m (24'7")	
Stick	Drop Nose 6.0 m (19'8")	
Maximum Reach	13 000 mm	42.7 ft
Maximum Height	14 270 mm	46.9 ft
Minimum Dump Height	3810 mm	12.5 ft
Maximum Reach at Ground Line	12 850 mm	42.2 ft
Maximum Depth	2970 mm	9.8 ft
Boom Pin Height	9300 mm	30.5 ft

STANDARD & OPTIONAL EQUIPMENT

Note: Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS AND STICKS			CAT TECHNOLOGY		
6.9 m (22'8") Straight MH boom		✓	Cat VisionLink	✓	
7.5 m (24'7") Straight MH boom		✓	Cat Payload	✓	
5.0 m (16'5") Straight MH stick		✓	HYDRAULIC SYSTEM		
5.5 (18'1) Drop Nose MH stick		✓	Electric main control valve	✓	
6.0 m (19'8") Drop Nose MH stick		✓	Automatic hydraulic oil warm up	✓	
Bucket linkage, B-type with lifting eye		✓	Automatic swing brake	✓	
CAB			Separate dedicated swing pump	✓	
Advanced sound-suppressed TOPS cab (ISO 12117-2 compliant)	✓		Boom and stick lowering check valves	✓	
254 mm (10") touchscreen monitor	✓		Medium pressure auxiliary circuit	✓	
Keyless push-to-start engine control	✓		Element type main hydraulic filter	✓	
LED dome lights	✓		SmartBoom™	✓	
Deluxe cab: air suspension heated seat, 254 mm (10") touchscreen monitor		✓	SmartStick	✓	
Premium cab: heated and cooled seat with automatic adjustable suspension, 254 mm (10") touchscreen monitor		✓	Heavy lift mode	✓	
Fixed one-piece laminated windshield and roof window (P5A glass)		✓	UNDERCARRIAGE AND STRUCTURES		
Fixed two-piece laminated windshield and roof window (P8B glass)		✓	5700 kg (12,500 lb) counterweight	✓	
Auxiliary relay		✓	All wheel drive	✓	
Operator Protective Guards (OPG)		✓	Automatic brake/axle lock	✓	
SAFETY AND SECURITY			Creeper speed	✓	
Rear- and right-side-view cameras	✓		Heavy-duty axles, advanced disc brake system, and travel motor with adjustable braking force	✓	
Secondary engine shutoff switch	✓		Lockable, oscillating front axle with remote greasing point	✓	
Lockable disconnect switch	✓		2.99 m (9'10") wide undercarriage		✓
2D E-fence with cab avoidance	✓		2.99 m (9'10") wide undercarriage with push blade		✓
360° visibility		✓	10.00-20 dual solid rubber tires		✓
Travel alarm		✓	11.00-20 16 dual pneumatic tires		✓
Inspection lighting		✓	ENGINE		
SERVICE AND MAINTENANCE			Cat C7.1 single turbo diesel engine	✓	
Automatic lubrication system for implement and swing system	✓		One-touch low idle with automatic engine speed control	✓	
S-O-S ports	✓		Automatic engine shutdown	✓	
Integrated vehicle health management system	✓		52° C (125° F) high-ambient capability	✓	
ELECTRICAL SYSTEM			Cold start capability -18° C (-0° F)	✓	
Roading and indicator lights at front and rear	✓		Electric fuel priming pump	✓	
Maintenance-free batteries	✓		Double element air filter with integrated precleaner	✓	
LED chassis light, left-hand/right-hand boom and stick lights, cab lights -1800 lumens	✓		On-demand electric cooling fans with auto-reverse function	✓	
Centralized electrical disconnect switch	✓				
Programmable time delay LED working lights	✓				
Electrical refueling pump		✓			

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at www.cat.com.

© 2024 Caterpillar. All Rights Reserved.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, SmartBoom, S-O-S, Product Link, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of Caterpillar Inc., registered in the United States and in other countries.
www.cat.com www.caterpillar.com

AEXQ3296-02
Replaces AEXQ3296-01
Build Number: 07D
(N Am, Europe, Turkey)

